



RLTMGL-526.5 / 1~200 mW

LD PUMPED ALL-SOLID-STATE GREEN LASER AT 526.5nm



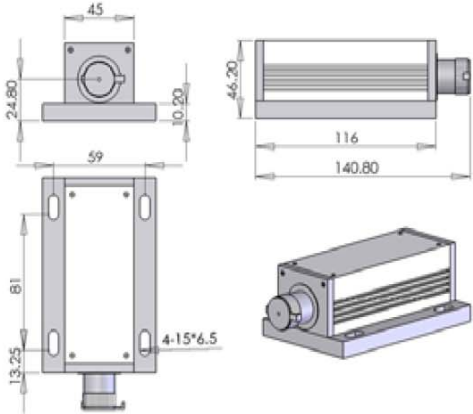
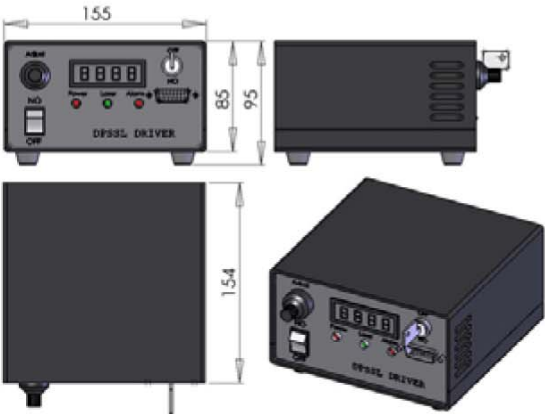

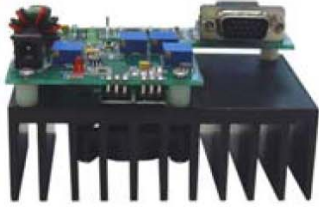
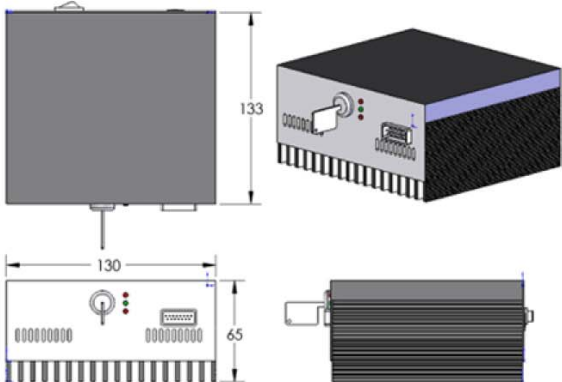
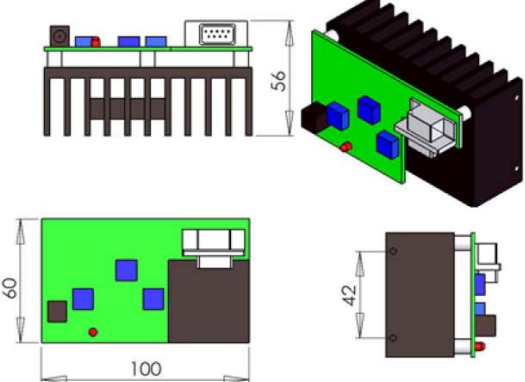
All solid state laser at 526.5nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in scientific experiment, optical sensor, measurement, instrument, communication, spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	526.5 ± 1		
Output power (mW)	>1, 5, 10, 20, ... , 200		
Transverse mode	Near TEM ₀₀		
Operating mode	CW		
Power stability (rms, over 4 hours)	<5%, <10%		
Warm-up time (minutes)	<10		
M ² factor	<1.2		
Beam divergence, full angle (mrad)	<1.5		
Beam diameter at the aperture (mm)	~2.0		
Beam height from base plate (mm)	24.8		
Polarization ratio	>100:1 (0 or 90 degree)		
Pointing stability after warm-up (mrad)	<0.05		
Operating temperature (°C)	10~35		
Power supply (90-264VAC or 5VDC)	PSU-LED	PSU-FDA	PSU-OEM
Expected lifetime (hours)	10000		
Warranty	1 year		



<p style="text-align: center;">MxL-523.5</p>	<p style="text-align: center;">PSU-LED</p>
<p style="text-align: center;">  </p> <p style="text-align: center;">140. 8(L)×73(W) ×46. 2(H) mm³, 0.6kg</p>	<p style="text-align: center;">  </p> <p style="text-align: center;">154 (L) ×155(W) ×95 (H) mm³, 1.5kg</p>
<p style="text-align: center;">  </p>	<p style="text-align: center;">  </p>
<p style="text-align: center;">PSU-FDA</p>	<p style="text-align: center;">PSU-OEM</p>
<p style="text-align: center;">  </p> <p style="text-align: center;">133 (L) ×130(W) ×65 (H) mm³, 1.2kg</p>	<p style="text-align: center;">  </p> <p style="text-align: center;">100 (L) ×60(W) ×56 (H) mm³, 0.2kg</p>
<p style="text-align: center;">  </p>	<p style="text-align: center;">  </p>