



RLT1310-5MGS

- Infrared FP Laser Diode
- 1310 nm, 5 mW
- Single transverse mode
- 5.6mm TO-Can with flat glass window



Description

RLT1310-5MGS is an infrared FP laser diode, with **single transverse mode** emission at typically 1310 nm and low operating current. **RLT1310-5MGS** comes in a 5.6 mm TO-Can with flat glass window and **integrated PD**. Two pin configuration options are available to choose from (see page 2)

Maximum Rating* ($T_{CASE} = 25^{\circ}C$)

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	V_R		2	V
Operating Temperature*	T_{OPR}	- 40	+ 85	$^{\circ}C$
Storage Temperature*	T_{STG}	- 40	+ 100	$^{\circ}C$
Soldering Temperature (max. 3s)	T_{SOL}		+ 260	$^{\circ}C$

* operating close to or outside these conditions may damage the device

Electro-Optical Characteristics ($T_{CASE} = 25^{\circ}C$)

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Peak Wavelength	λ_P	1290	1310	1330	nm
Optical Output Power	P_O		5		mW
Spectral Width (FWHM)	λ		2	5	nm
Beam Divergence (FWHM)	$\theta_{ } \times \theta_{\perp}$		25 x 38		deg
Operating Voltage	V_F		1.2	1.5	V
Threshold Current	I_{th}		10	20	mA
Operating Current	I_F		35	50	mA
Reverse Current (PD)	I_{RP}		0.3		mA







Electrical Connection

RLT1310-5MGS

Bottom View



Pin #	Function
Pin 1	PD Anode
Pin 2	LD Anode, Case
Pin 3	LD Cathode
Pin 4	PD Cathode




RLT1310-5MGS-P2

Bottom View

Pin #	Function
Pin 1	LD Anode, PD Cathode
Pin 2	Case
Pin 3	LD Cathode
Pin 4	PD Anode



Outline Dimensions

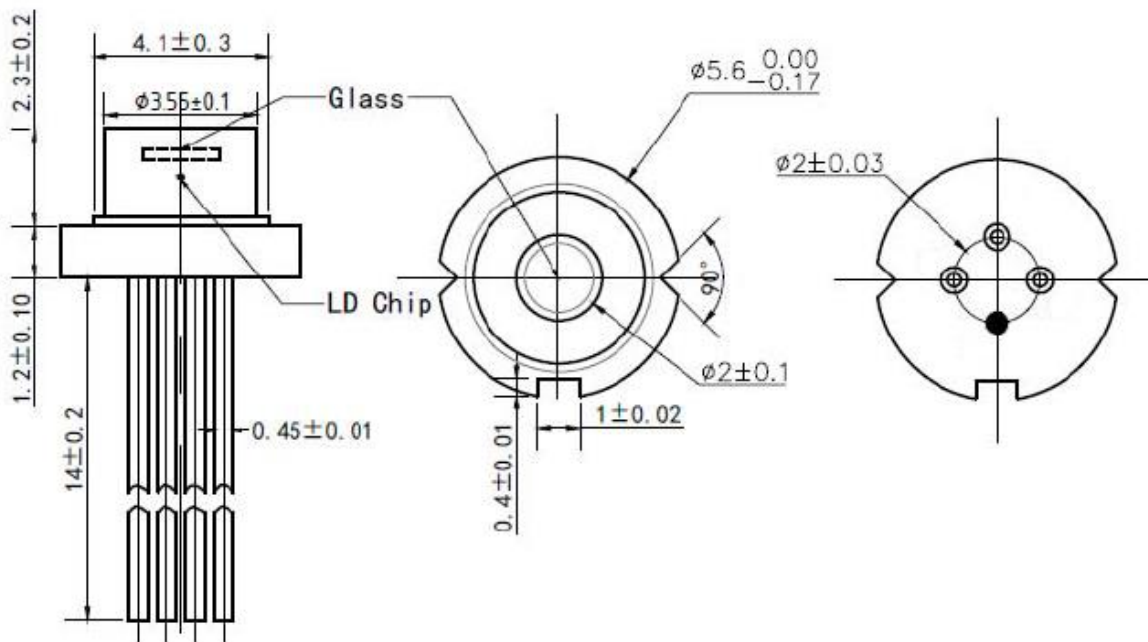

All dimensions in mm



Precautions

Safety

Caution: Laser light emitted from any laser diode may be **harmful to the human eye**. Avoid looking directly into the laser diode's aperture when the diode is in operation.

Note: The use of optical lenses with this laser diode will increase eye hazard

ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, it is strongly advised to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

Operating Considerations

It is strongly advised to only operate this laser diode with a current source. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory.** Laser diodes may be damaged by excessive drive currents or switching transients

It is advised, to operate the laser diode at the lowest temperature possible, and to never exceed maximum specifications as outlined in the datasheet. Device degradation will accelerate with increased temperature. **Proper heat sinking will greatly enhance stability and lifetime of the laser diode**

© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice.