



ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -O. FAX. -44

1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM



RLT405-250MGS

- Violet Laser Diode
- 405 nm, 250 mW
- Single transverse mode
- 5.6 mm Package, Flat Window



Description

RLT405-200MGS is a violet Fabry Perot laser diode, typically emitting at 405 nm. It features single transverse mode emission and wide operating temperature range of up to 70°C. It is an efficient radiation source for many applications like laser projection, holography, metrology, or use in the biomedical field. **RLT405-250MGS** comes in 5.6 mm TO-Can package **without PD**.

Additional options like closer peak wavelength selection are available on request.

Maximum Rating* ($T_{CASE} = 25^{\circ}C$)

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	V_R		5	V
Operating Temperature*	T_{OPR}	0	+ 70	°C
Storage Temperature*	T_{STG}	- 40	+ 85	°C
Soldering Temperature (max. 3s)	T_{SOL}		+ 260	°C

* operating close to or outside these conditions may damage the device

Electro-Optical Characteristics ($T_{CASE} = 25^{\circ}C$)

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Peak Wavelength *	λ_P	395	405	415	nm
Spectral Width	λ_{Δ}		2.0		nm
Optical Output Power	P_O		250		mW
Operating Voltage	V_F		5.5	6.5	V
Threshold Current	I_{th}		30	60	mA
Operating Current	I_F		190	210	mA
Slope Efficiency	η		1.7		W/A
Beam Divergence (FWHM)	parallel	$\theta_{ }$	10		deg.
	perpendicular	θ_{\perp}	22		deg.

* optional: down to ± 5 nm







Electrical Connection

Pin Configuration

PIN #	Function
1	LD Anode
2	Case
3	LD Cathode




Bottom View



Outline Dimensions

5.6 mm

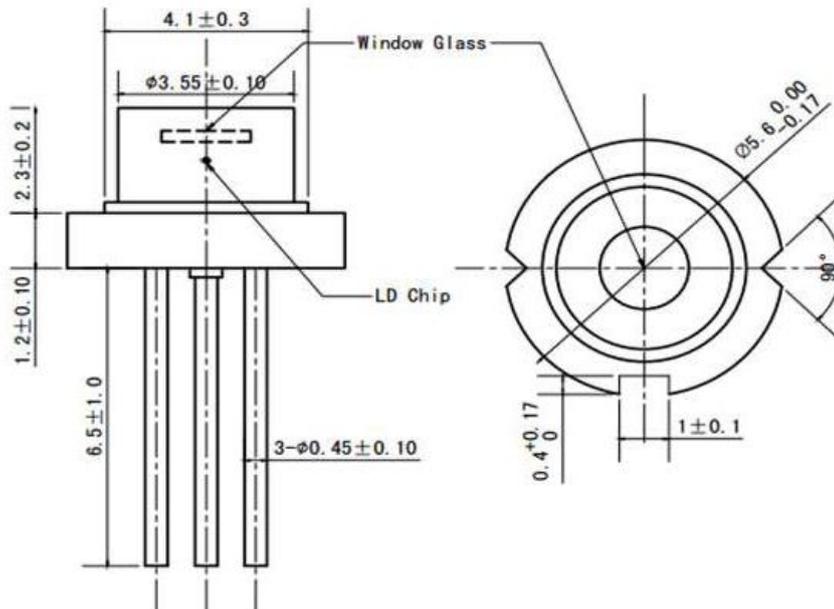

All dimensions in mm



Precautions

Safety

Caution: Laser light emitted from any laser diode may be **harmful to the human eye**. Avoid looking directly into the laser diode's aperture when the diode is in operation.

Note: The use of optical lenses with this laser diode will increase eye hazard

ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, it is strongly advised to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

Operating considerations

It is strongly advised to only operate this laser diode with a current source. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory.** Laser diodes may be damaged by excessive drive currents or switching transients

It is advised, to operate the laser diode at the lowest temperature possible, and to never exceed maximum specifications as outlined in the datasheet. Device degradation will accelerate with increased temperature. **Proper heat sinking will greatly enhance stability and life time of the laser diode**