

S6705MG



ETENTION ERVE PRECAUTIONS FOR HANDLING

ELECTROSTATIC SENSITIVE DEVICES

ΔΤ


TECHNICAL DATA

Infrared Laser Diode

Features

- Lasing Mode Structure: single mode
- Peak Wavelength : typ. 670 nm
- Optical Ouput Power: 5 mW
- Package: 5.6 mm



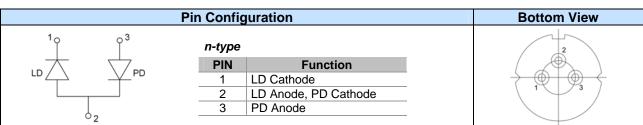

Absolute Maximum Ratings (T_c=20°C)

Item	Symbol	Value	Unit
CW Output Power	Po	7	mW
LD Reverse Voltage	Vr	2	V
PD Reverse Voltage	V _{rPD}	30	V
Operating Case Temperature	T _c	-10 +60	°C
Storage Temperature	T _{stg}	-15 +85	°C


Specifications (T_c=20°C)

Item	Symbol	Min.	Тур.	Max.	Unit		
Optical Specifications							
CW Output Power	Po	-	5	-	mW		
Center Wavelength	λ _C	660	670	678	nm		
FWHM Beam Divergence	θ∥	7.5	9	11	deg		
	θ⊥	25	32	35	deg		
Electrical Specifications							
Threshold Current	l _{th}	-	24	35	mA		
Operating Current	I _{op}	-	34	45	mA		
Slope Efficiency	η	0.4	0.5	-	mW/mA		
Operating Voltage	U _{op}	-	2.2	2.6	V		
Monitor Current	l _m	0.1	0.2	0.5	mA		


The above specifications are for reference purpose only and subjected to change without prior notice.



Package Dimensons

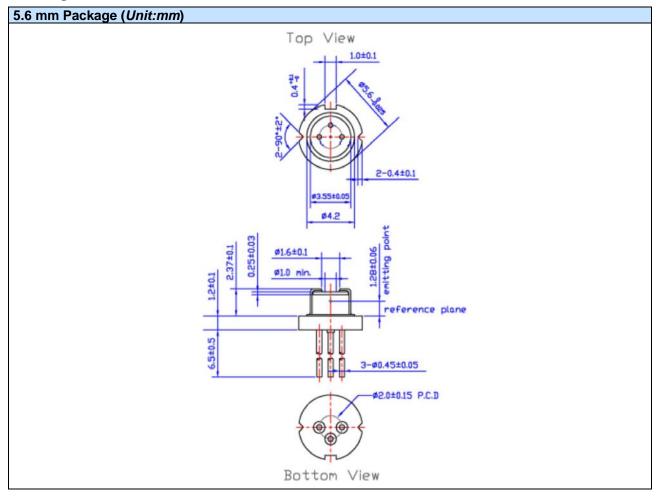


Typical Performance Curves

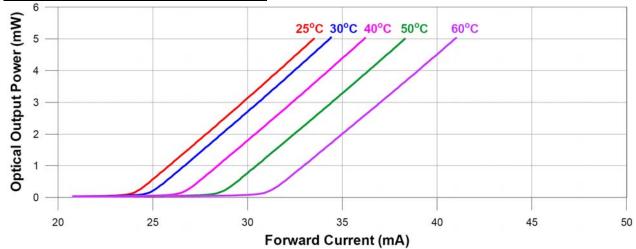


Optical Ouput Power vs. Forward Current




Forward Voltage vs. Forward Current

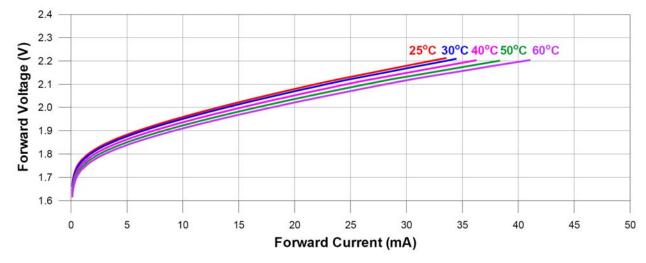



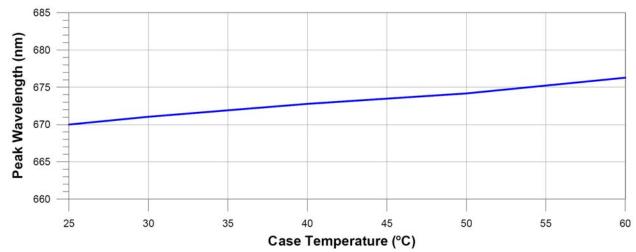




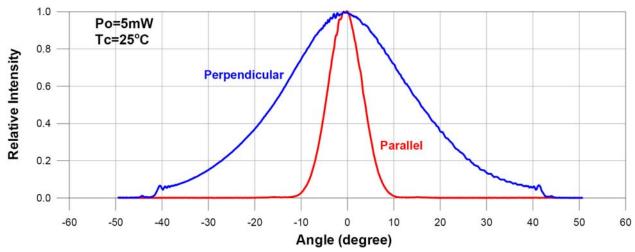





Monitor Current vs. Optical Output Power

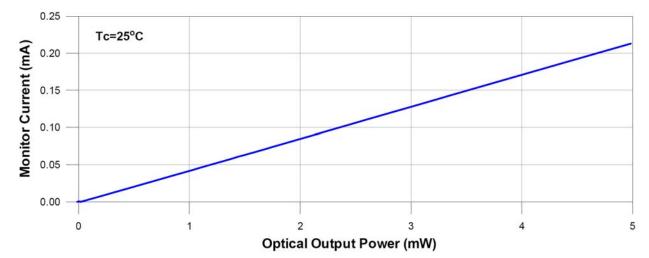



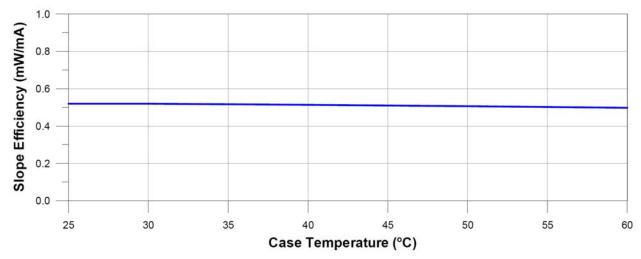



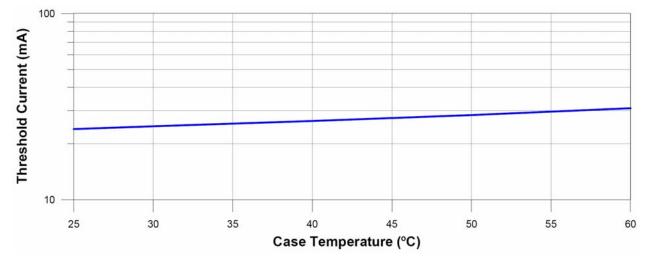



Safety of Laser light

 Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.



Cautions

- 1. Operating methode
- This LD shall change its forward voltage requirement and optical ouput power according to temperature change. Also, the LD will require more operation current to maintain same ouput power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by swithing on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriat countermeasures to reduce chattering and/or overshooting in the circuit.

2. Static Electricity

• Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handeling the product.

3. Absolute Maximum Rating

• Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated strictly below absolute maximum rating.

