


ROITHNER LASERTECHNIK GmbH

 WIEDNER HAUPTSTRASSE 76
 TEL. +43 1 586 52 43 -0, FAX. -44

 1040 VIENNA
 AUSTRIA
 OFFICE@ROITHNER-LASER.COM


S8081WG

- IR Laser Diode
- 808 nm, 1000 mW
- Multi mode
- TO9 package, without window glass



Description

S8081WG is an IR laser diode, typically emitting at 808 nm, with a wide operating temperature range of up to 50°C, low operating current and low divergence angle. **S8081WG** comes in 9 mm TO-Can package **without** monitor photodiode, and **without** glass window

Maximum Rating* ($T_{CASE} = 25^\circ\text{C}$)

Parameter	Symbol	Values		Unit
		Min.	Max.	
Optical Output Power* ¹	P_{MAX}		1100	mW
Reverse Voltage	V_R		2	V
Operating Temperature* ¹	T_{OPR}	- 10	+ 50	°C
Storage Temperature	T_{STG}	- 10	+ 85	°C
Soldering Temperature (max. 3s)	T_{SOL}		+ 260	°C

*¹ operating at maximum ratings may influence the life time


Electro-Optical Characteristics ($T_{CASE} = 25^\circ\text{C}$)

Parameter	Symbol	Values		Unit
		Min.	Typ.	Max.
Peak Wavelength	λ_P	803	808	813
Optical Output Power	P_O		1000	mW
Operating Voltage	V_F		2.0	2.2
Threshold Current	I_{th}		220	mA
Operating Current	I_F		1200	1500
Slope Efficiency	η	0.95	1.1	W/A
Beam Divergence (FWHM)	parallel	Θ_{II}	8	deg.
	perpendicular	Θ_{\perp}	28	deg.




Electrical Connection

Pin Configuration	
Pin #	Function
Pin 1	Not connected
Pin 2	LD Cathode
Pin 3	LD Anode, Case



Bottom View





ROITHNER LASERTECHNIK GmbH


WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -0, FAX. -44

1040 VIENNA
AUSTRIA
OFFICE@ROITHNER-LASER.COM




Performance Characteristics


Optical Output Power vs. Forward Current

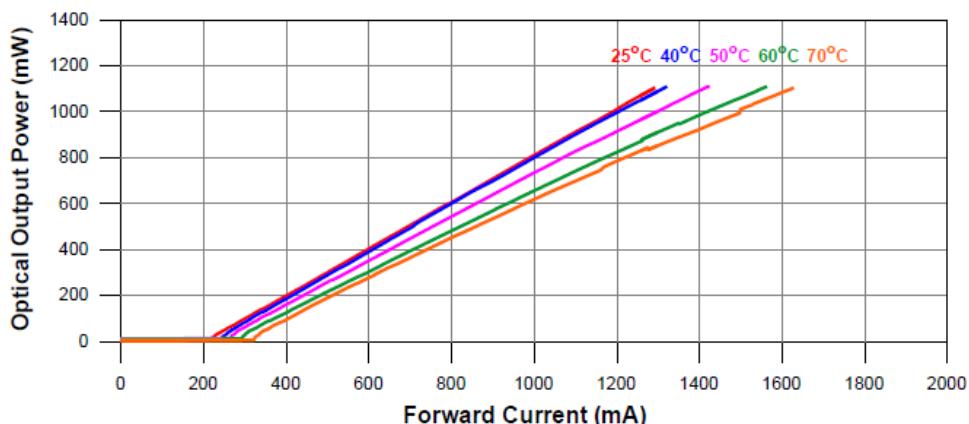

Forward Voltage vs. Forward Current

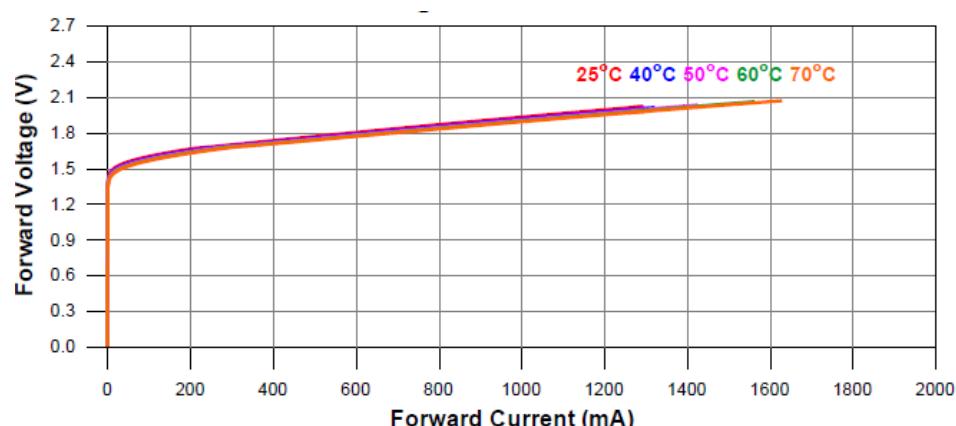

Peak Wavelength vs. Case Temperature

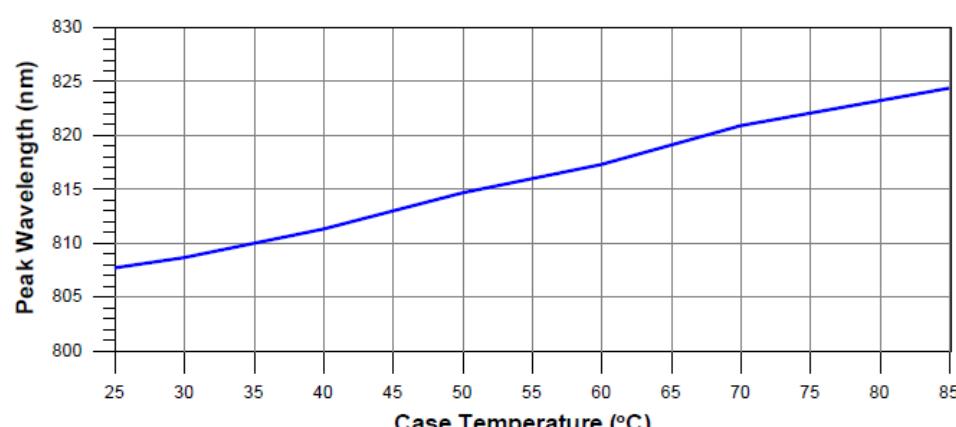



ROITHNER LASERTECHNIK GmbH


WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -0, FAX. -44

1040 VIENNA
AUSTRIA
OFFICE@ROITHNER-LASER.COM




Performance Characteristics


Far-Field Pattern

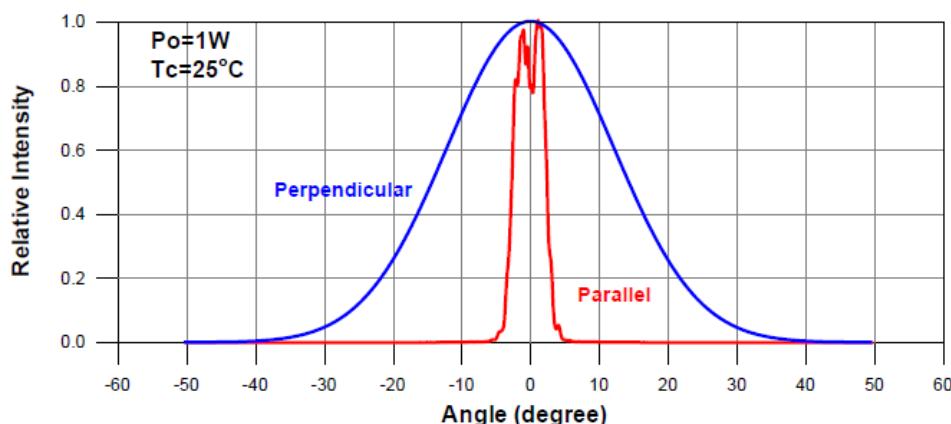

Slope Efficiency vs. Case Temperature

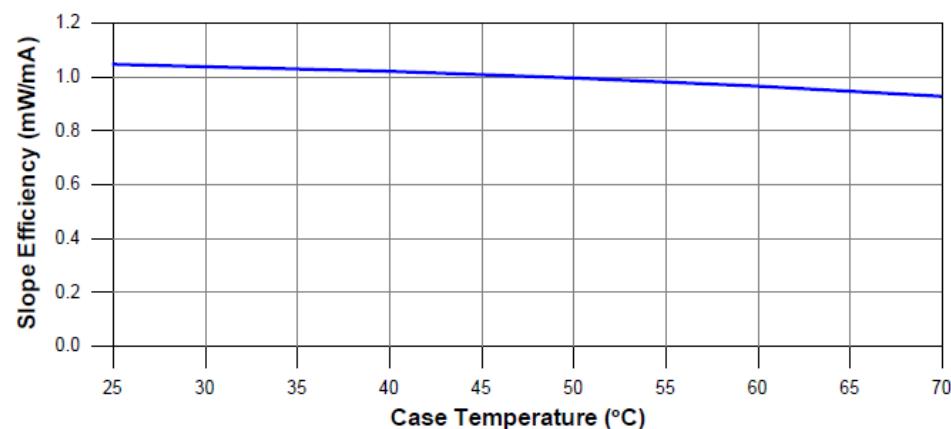


Threshold Current vs. Case Temperature

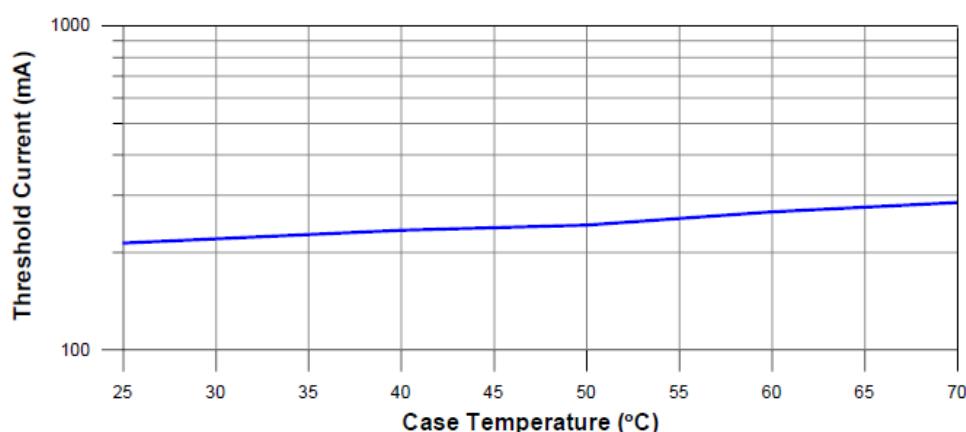



Outline Dimensions

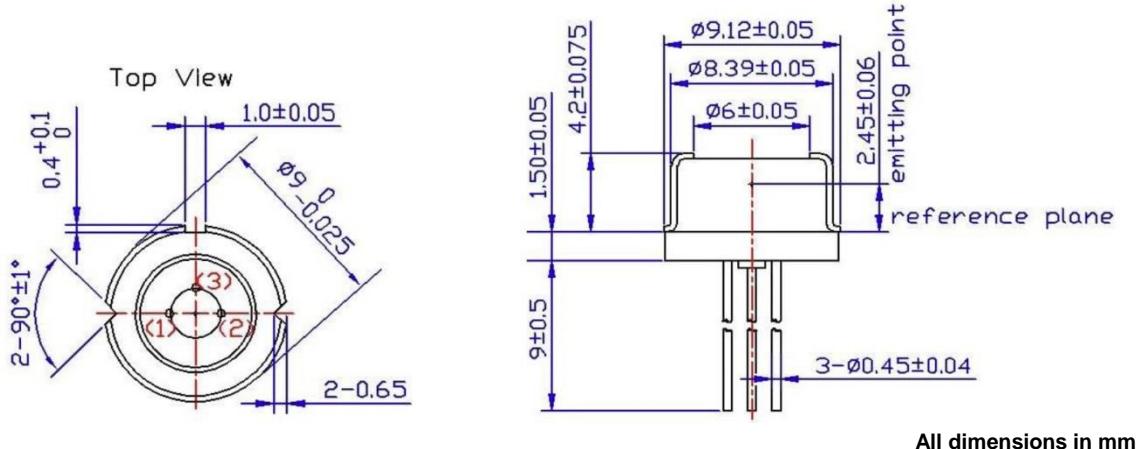

Precautions

Safety

Caution: Laser light emitted from any laser diode may be **harmful to the human eye**. Avoid looking directly into the laser diode's aperture when the diode is in operation.

Note: The use of optical lenses with this laser diode will increase eye hazard

ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, it is strongly advised to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

Operating Considerations

It is strongly advised to only operate this laser diode with a current source. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory.** Laser diodes may be damaged by excessive drive currents or switching transients

It is advised, to operate the laser diode at the lowest temperature possible, and to never exceed maximum specifications as outlined in the datasheet. Device degradation will accelerate with increased temperature. **Proper heat sinking will greatly enhance stability and life time of the laser diode**