ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

rev 1.1, 18.07.2017

SMC1050

- Infrared LED
- 1050 nm, 1.3 mW
- SMD package, Ceramic
- Dimension: 3.0 x 2.0 x 1.1 mm
- Viewing Angle: 124°

RoHS COMPLIANT Pb-Free

Description

SMC1050 is a surface mount InGaAsP LED with a typical peak wavelength of **1050 nm** and radiation of **1.3 mW**. It comes in SMD package (ceramic) and is sealed with silicone or epoxy resin.

Maximum Ratings (T_{CASE}=25°C)

Parameter	Symbol	Values Min.	Values Max.	Unit
Power Dissipation	P_D		130	mW
Forward Current	I_F		100	mA
Pulse Forward Current *1	I_{FP}		1000	mA
Reverse Voltage	V_F		5	V
Thermal Resistance	R_{THJA}		80	K/W
Junction Temperature	T_J		120	°C
Operating Temperature	T_{CASE}	- 40	+ 85	°C
Storage Temperature	T_{STG}	- 40	+ 100	°C
Lead Solder Temperature *2	T_{SLD}		+ 250	°C

*1 *duty=1%, pulse width = 10 µs*
*2 *must be completed within 3 seconds*

Electro-Optical Characteristics (T_{CASE}=25°C)

Parameter	Symbol	Conditions	Values Min.	Values Typ.	Values Max.	Unit
Peak Wavelength	λ_P	I_F=50mA	1000		1100	nm
Half Width	$\Delta\lambda$	I_F=50mA		50		nm
Forward Voltage	V_F	I_F=50mA I_{FP}=1A		1.2 1.9	1.3	V
Radiated Power *1	P_O	I_F=50mA I_{FP}=1A		5.0 30		mW
Radiant Intensity *2	I_E	I_F=50mA I_{FP}=1A		2.2 13		mW/sr
Viewing Angle	φ	I_F=50mA		132		deg.
Rise Time	t_r	I_F=50mA		80		ns
Fall Time	t_f	I_F=50mA		30		ns

*1 *measured by G8370-85*
*2 *measured by Ando Optical Multi Meter AQ2140 & AQ2742*

ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

Typical Performance Curves

Forward Current vs. Forward Voltage

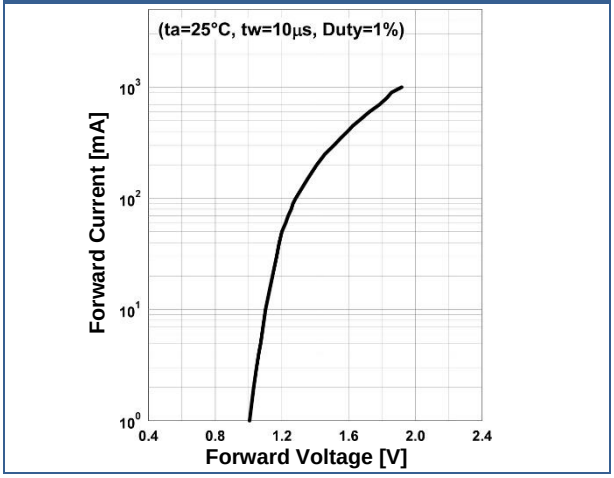

Rel. Radiant Intensity vs. Forward Current

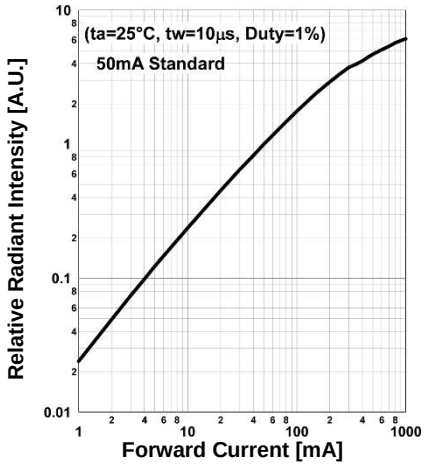

Forward Current vs. Pulse Duration

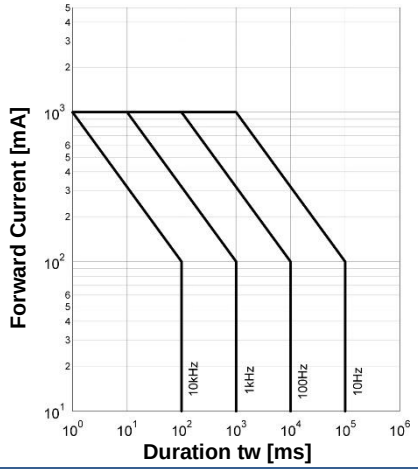

Allowed Forward Current vs. Ambient Temperature

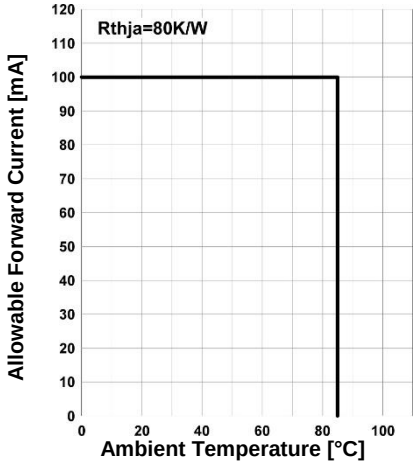

Forward Voltage vs. Ambient Temperature

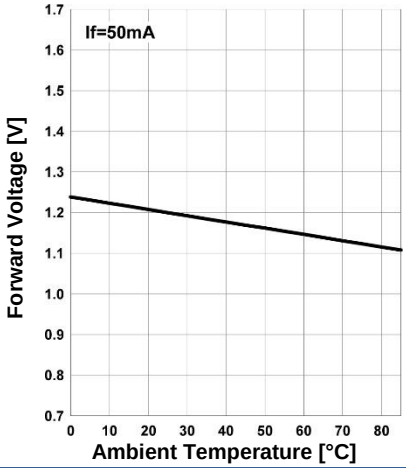

Rel. Radiant Intensity vs. Ambient Temperature

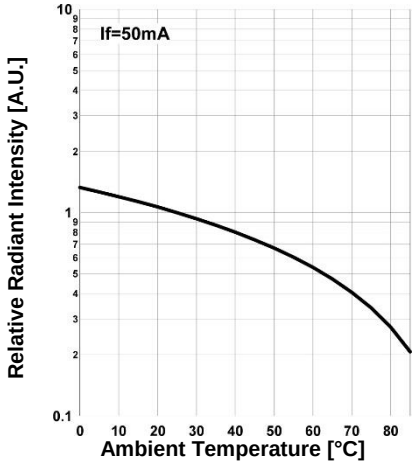

ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

Peak Wavelength vs. Ambient Temperature

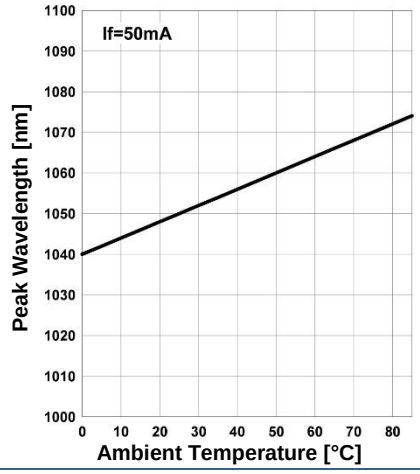

Relative Spectral Emission

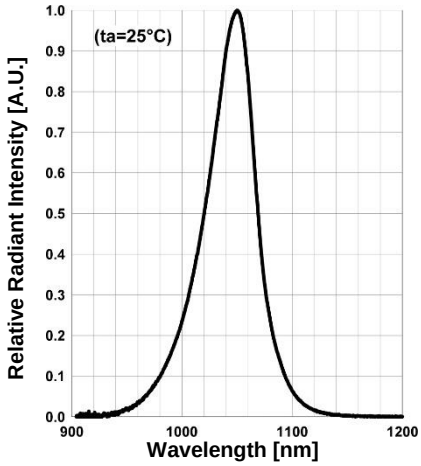

Radiation Characteristics

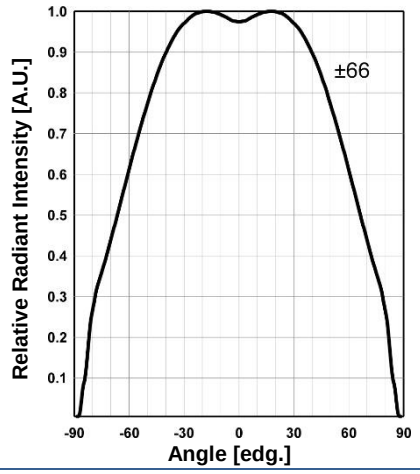

Radiation Characteristics

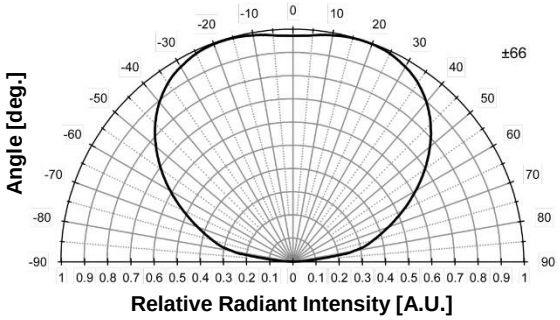

Outline Dimensions

SMC1050 **flat**

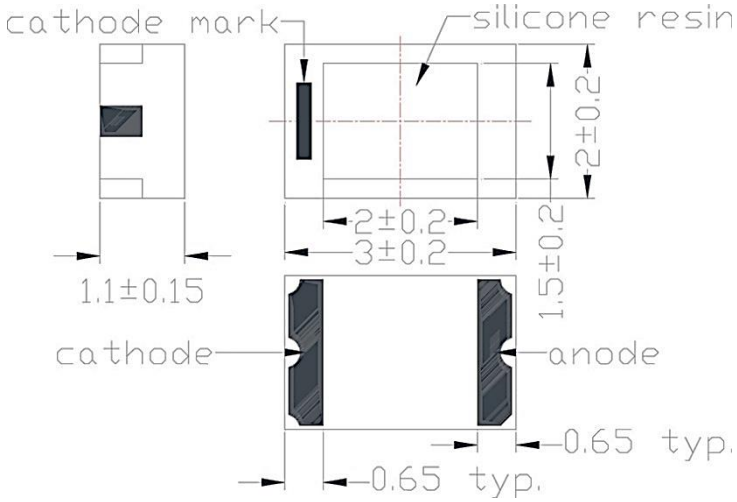

All Dimensions in mm

Precautions

Soldering:

- Do avoid overheating of the LED
- Do avoid electrostatic discharge (ESD)
- Do avoid mechanical stress, shock, and vibration
- Do only use non-corrosive flux
- Do not apply current to the LED until it has cooled down to room temperature after soldering

Recommended soldering conditions:

This LED is designed to be reflow soldered on to a PCB. If dip soldered or hand soldered, its reliability cannot be guarantee.
Nitrogen reflow soldering is recommended. Air flow soldering conditions can cause optical degradation, caused by heat and/or atmosphere.

IR Reflow Soldering Profile (Lead-free Solder)

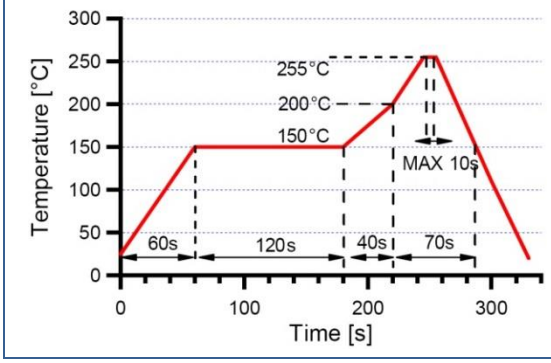

Recommended Soldering Patterns



Unit: mm

Above table specifies the maximum allowed duration and temperature during soldering. It is strongly advised to perform soldering at the shortest time and lowest temperature possible.

Cleaning:

Cleaning with isopropyl alcohol, propanol, or ethyl alcohol is recommended
DO NOT USE acetone, chloroseen, trichloroethylene, or MKS
DO NOT USE ultrasonic cleaners

Static Electricity:

LEDs are sensitive to electrostatic discharge (ESD). Precautions against ESD must be taken when handling or operating these LEDs. Surge voltage or electrostatic discharge can result in complete failure of the device.

Radiation:

Those LEDs do emit **invisible light**, which is invisible and may cause cancer. Do avoid exposure to the emitted light. It is further advised to attach a warning label on products/systems.

Operation:

Do *only* operate LEDs with a current source.
Running these LEDs from a voltage source will result in complete failure of the device.
Current of a LED is an exponential function of the voltage across it. Usage of current regulated drive circuits is mandatory.