



ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -O. FAX. -44

1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM



CW650-01C

- RED Laser Diode Module
- 650 nm, <1 mW
- Focusable Acryl Lens
- Automatic Power Control
- USB-C Connector



Description

CW650-01C is a compact size fix collimated laser diode module with a typical emission wavelength of **650 nm**, and an optical output power of **<1 mW**. It features automatic power control (**APC**) driving electronics for stable operation, and comes with an industry standard **USB-C connector**. A matching **heat sink**, and suitable **laser module holder** is optionally available for quick setup and convenient operation (see next page for details).


Maximum Ratings

Parameter	Values		Unit
	Min.	Max.	
Operating temperature	- 10	+ 50	°C
Storage temperature	- 40	+ 70	°C




Electro-Optical Characteristics (T_{CASE} = 25°C)

Parameter	Values			Unit
	Min.	Typ.	Max.	
Peak Wavelength		650		nm
Radiated Power			1	mW
Beam diameter at aperture		4		mm
Beam shape	elliptical			
Beam divergence		1.0		mrad
Supply Voltage		5		VDC
Material body	Brass, Nickel plated (+VDC)			
Material lens	acryl			
Dimensions	Ø 12 x 36.5			mm
Connector	IEC 62680-1-3 (USB-C)			

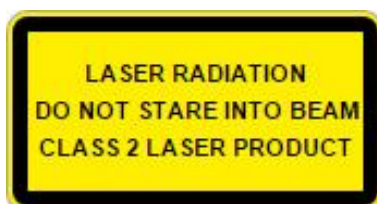



Outline Dimensions

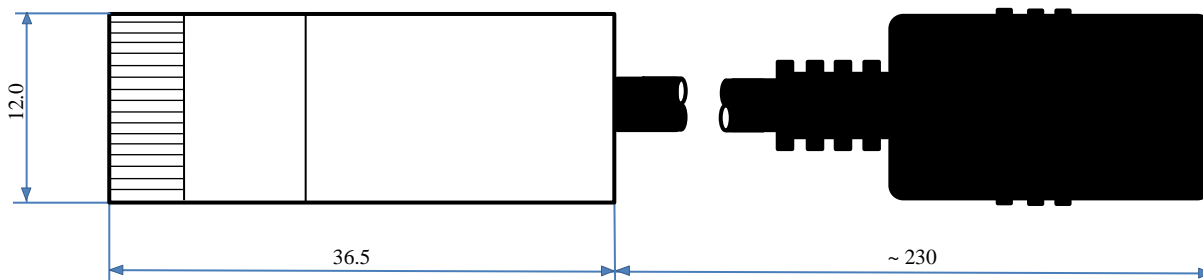

Precautions

Static Electricity:

Precautions against electrostatic discharge (ESD) must be taken when handling or operating the module. Surge voltage or electrostatic discharge can result in complete failure of the laser diode.

Heat Sinking:

In order to maintain lifetime and stability of the laser module, it is essential to provide efficient heat management.

Safety:

This laser module emits highly concentrated visible light which can be **hazardous to the human eye and skin**. It is classified as **CLASS 2 laser product** according to IEC 60825-1 and 21 CFR Part 1040.10 Safety Standards. Actual laser light emitted and precautions necessary strongly depend on mode of operation.



Accessories

Heat Sink

SQ50x34

- Al, black anodized
- Clamping mechanism
- 50 x 50 x 34 mm
- 114 g



Holder

RLM-1250

- Steel, black anodized
- Height, reach, tilt adjustable
- Fixture 360° turnable
- Max. diameter: 12.5 mm
- 69 x 67 mm
- 152 g

