



FCPD-3000-C9

- Pigtailed InGaAs PIN Photodiode
- Ø 3000 µm active area
- 0.85 – 1.7 µm spectral range
- Coaxial package
- 9 µm single mode fiber



Description

FCPD-3000-C9 is an **InGaAs** PIN photodiode with an active area of Ø 3000 µm in a pigtailed coaxial package with **9 µm single mode fiber** and FC/PC connector. It features, a wide range of sensitivity from 850 nm to 1700 nm, high responsivity, low terminal capacitance, and low dark current. **FCPD-3000-C9** is optionally available with different connectors, and receptacle package without fiber.

Maximum Rating (T_{CASE} = 25°C)

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	V _R		20	V
Forward Current	I _F		10	mA
Operating Temperature	T _{OPR}	- 40	+ 85	°C
Storage Temperature	T _{STG}	- 40	+ 125	°C
Soldering Temperature (max.10s)	T _{SOL}		+ 260	°C



Electro-Optical Characteristics (T_{CASE} = 23°C)

Parameter	Symbol	Condition	min.	typ.	max.	Unit
Spectral Range	λ		0.85		1.7	µm
Aperture Diameter	Ø			3000		µm
Peak Sensitivity	A _P	V _R =0 V		1.55		µm
Dark Current	I _D	V _R =5 V		10	100	nA
Capacitance	C _J	V _R =5 V		300		pF
Responsivity	S _λ	1.31 µm		0.80		A/W
		1.55 µm		0.85		
Saturation Power	P _S	V _R =5 V		10		mW
Rise/Fall time	t _r / t _f	V _R =5 V			40	ns
Fiber Specification	Fiber Core			9		µm
	Fiber Length			80		
	Fiber Connector			FC/PC *		

* other options on request




Electrical Connection


Pin Configuration*

Pin #	Function
Pin 1	PD Anode
Pin 2	Case
Pin 3	PD Cathode


* subject to change



Bottom View



Outline Dimensions

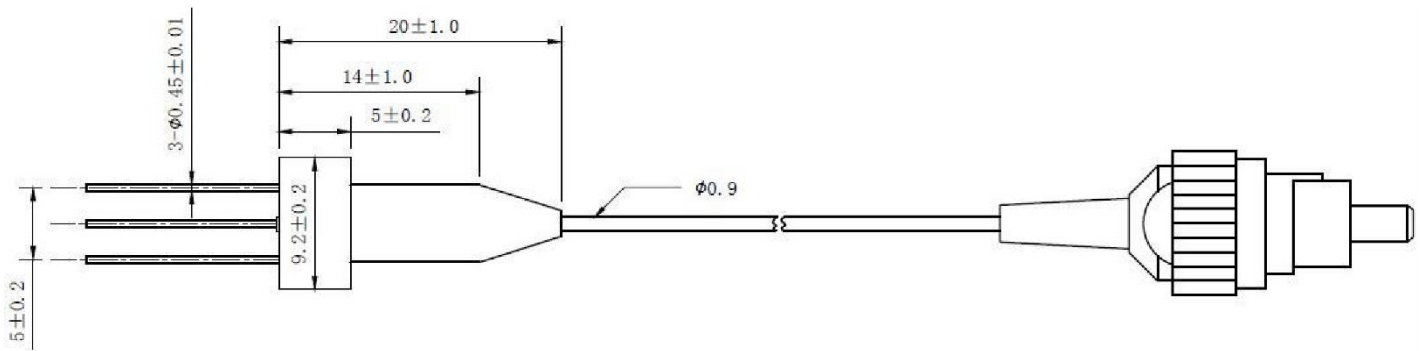

All dimensions in mm

© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice