




## GUVC-T10GM-LA

- UV Sensor Module
- UVC, 220-280 nm
- Single Supply Voltage
- Output signal: 0 – 5 VDC
- Dimension: 28 x 17 x 9 mm

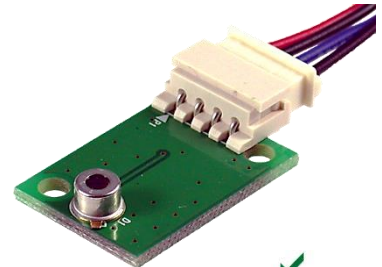

### Description

**GUVC-T10GM-LA** is a UVC sensor module working in the spectral range of 220-280 nm. It contains UV detector GUVC-T10GD and additional electronic components for fast preliminary experiments. The low level photocurrent will be converted into an **output voltage** between **0-5 V** and can be further used as your ADC input.

### Absolute Maximum Ratings

Parameter	Symbol	Values	Unit
Supply Voltage (DC)	$V_{CC}$	1.8 – 5.5	V
Operating Temperature	$T_{CASE}$	-30 – +85	°C
Storage Temperature	$T_{STG}$	-40 – +90	°C
Soldering Temperature *	$T_{SLD}$	260	°C

\* must be completed within 10 seconds

### Electro-Optical Characteristics


$T_{CASE} = 25^{\circ}C$

Parameter	Symbol	Values	Unit
Supply Voltage (DC)	$V_{CC}$	1.8 – 5.5	V
Supply Current	$I_Q$	typ. 0.05	mA
Spectral Detection Range (10% of Max.)	$\lambda$	220 – 280	nm
Output Voltage (DC)	$V_{out}$	0 – 5	V
Detection Power Range ( $V_{CC}=5V$ )	$P$	0 – 20	mW/cm <sup>2</sup>
Response Time	$T$	10	ms



## Outline Dimensions


### GUVC-T10GM-LA

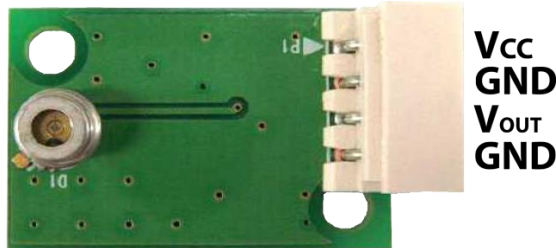


28 x 17 x 9 mm

## Typical Performance Curves

### Relative Responsivity

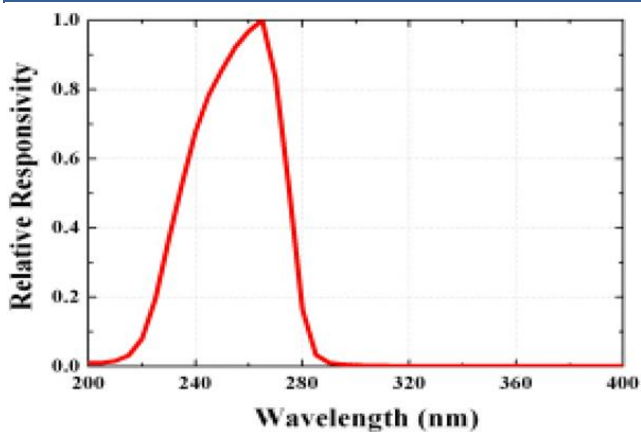

### Output Voltage vs. UV Power

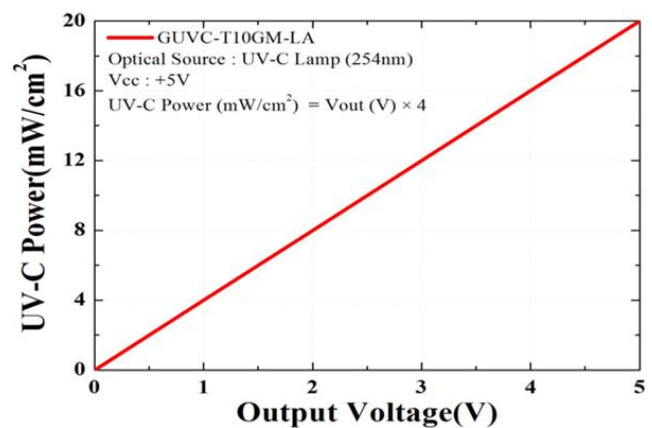

## Caution

ESD can damage the device hence please avoid ESD.  
Insulate the cap of TO-CAN or it can cause malfunction of the device.

© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice