562H.00.00.309

- Laser Safety Goggle
- Protection, UV+IR
- < 430 nm, >750 nm
- Filter: Polycarbonate, Green
- VLT: 45%
- Frame: 562H Series, Perled White





Specifications

| Frame | | | | |
|-------------------|--------------------|--|--|--|
| Complete Code | 562H.00.00.999 | | | |
| Description | Goggles | | | |
| Material | SYLEX | | | |
| Colour | Perled White | | | |
| Field of View | >40° | | | |
| Weight | 44.8 g | | | |
| Dimension (LxWxT) | 156 x 166 x 2.3 mm | | | |

| Filter | | | |
|----------------------------|-----------------|--|--|
| Code | FL20006 | | |
| Туре | Full Protection | | |
| Material | Polycarbonate | | |
| Colour | Green | | |
| VLT | 45% | | |
| Alignment Laser Wavelength | 470 – 650 nm | | |

Frame

The 562H series is a device which can be equipped with filters both in polycarbonate and glass, with a frame made of Sylex, a technologically advanced material. It can be worn over any prescription glasses, offering maximum versatility. The adjustable temples with Softpad technology allow perfect stability in any working condition.

Product technical features:

- 6-Base absorbing polycarbonate and glass filters
- Wide field of vision
- Asian fitting
- With Softpad technology
- Ergonomic wraparound temples fit perfectly on user face
- Universal overspec on every prescription glasses

Sylex:

Made of certified plastic, Sylex was developed to make the frames of devices providing protection from laser sources. It combines the high level of protection offered by metal frames with the comfort of plastic, ensuring total safety and a light-weight structure.










www.roithner-laser.com

Filter Optical Density And Transmittance

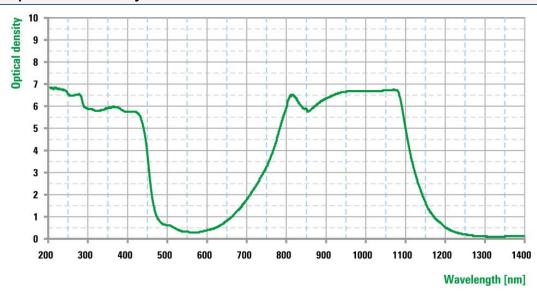

Protective Eyewear Against Laser Radiation

| Code | Wavelength | Optical Density | Protection Level |
|------|----------------|-----------------|---------------------|
| 309 | 190 – 315 nm | 5 | D LB5+IR LB3 |
| | 315 – 430 nm | 5 | DIR LB5 |
| | 750 – 1100 nm | 3 | DIR LB3 |
| | 775 – 1100 nm | 4 | DIR LB4 |
| | 790 – 1090 nm | 5 | DIR LB5 |
| | 920 – 1075 nm | 6 | DIR LB6 M LB6Y |
| | 1000 – 1070 nm | 7 | D LB6+IR LB7+M LB7Y |
| | 1030 – 1065 nm | 8 | D LB6+IR LB7+M LB7Y |
| | 10600 nm | 6 | DI LB4 U S CE |

Compliant with the provisions of the Directive 89/686/EEC, as amended by the Directives 93/68/EEC, 93/95/EEC and 96/58/EC on personal equipment, and the Italian D.L. 475 of 04/12/1992 and D.L. 10 of 02/01/1997 enacting them for PPE belonging to Class II; is identical to PPE covered by

EC Certification n.: C1131.3U 0068/ETI-DPI/059-2005 Rev.7

issued on: 27/07/2017 03/08/2017 by: ECS GmbH / Masini

Reference Standards

EN 207:2009 EN 208:2009

© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice

www.roithner-laser.com 2