

## ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76 IO40 VIENNA AUSTRIA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



## S808200MG



### **TECHNICAL DATA**

## **Infrared Laser Diode**

#### **Features**

Lasing Mode Structure: multi mode
Peak Wavelength: typ. 808 nm
Optical Ouput Power: 200 mW

Package: 5.6 mm



#### **Electrical Connection**

Pin Configuration			Bottom View		
10 03	n-type			2	
1.5 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	PIN	Function			
LD PD	1	LD Cathode		$\rightarrow \oplus \mid \oplus \rightarrow$	
	2	LD Anode, PD Cathode		\ 1 \ 3 \	
	3	PD Anode			
02					

### Absolute Maximum Ratings ( $T_C=20$ °C)

Item	Symbol	Value	Unit
CW Output Power	Po	200	mW
LD Reverse Voltage	V <sub>r</sub>	2	V
PD Reverse Voltage	$V_{rPD}$	30	V
Operating Case Temperature	T <sub>C</sub>	-10 +40	°C
Storage Temperature	T <sub>stq</sub>	-10 +85	°C

## Specifications ( $T_C=20$ °C)

Item	Symbol	Min.	Тур.	Max.	Unit			
Optical Specifications								
CW Output Power	Po	ı	200	-	mW			
Center Wavelength	$\lambda_{\mathrm{C}}$	805	808	811	nm			
FWHM Beam Divergence	$\Theta_{\parallel}$	ı	12	-	deg			
FWI IW Beam Divergence	θΪ	ı	40	-	deg			
Electrical Specifications								
Threshold Current	I <sub>th</sub>	ı	70	80	mA			
Operating Current	l <sub>op</sub>	ı	260	280	mA			
Slope Efficiency	η	0.8	1	-	mW/mA			
Operating Voltage	$U_{op}$	-	1.9	1.95	V			
Monitor Current	I <sub>m</sub>	-	0.3	2	mA			

The above specifications are for reference purpose only and subjected to change without prior notice.




# ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76

1040 VIENNA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM




## Package Dimensons

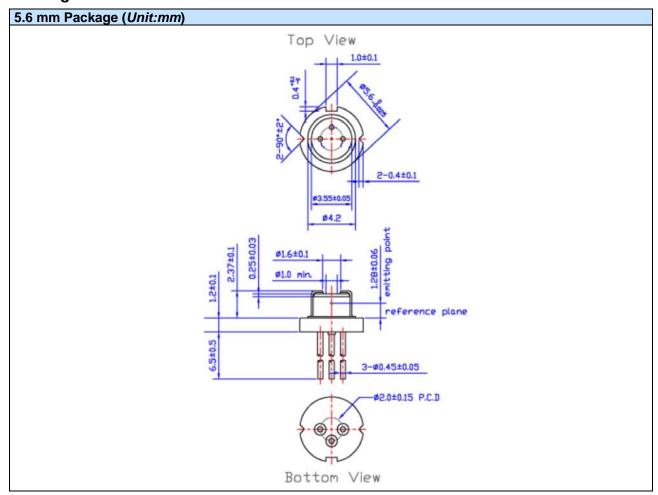

### Typical Performance Curves

## **Optical Ouput Power vs. Forward Current**

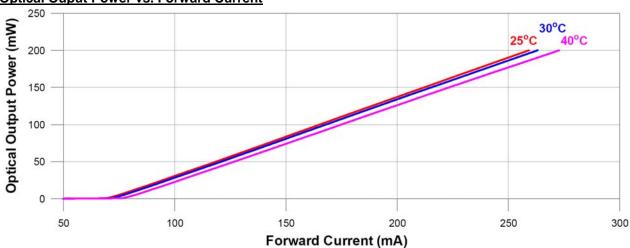




# ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76


1040 VIENNA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM




#### Forward Voltage vs. Forward Current

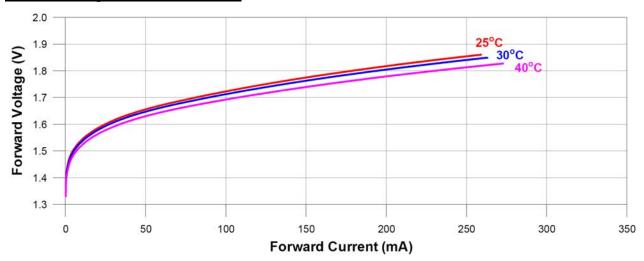

#### Peak Wavelength vs. Case Temperature

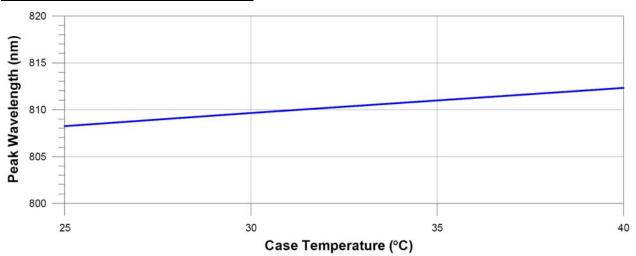

### **Far-Field Pattern**

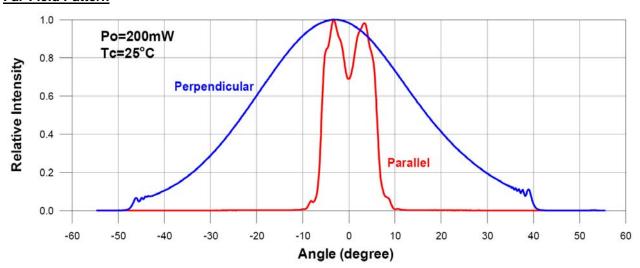




# ROITHNER LASERTECHNIK GIRDH


WIEDNER HAUPTSTRASSE 76 IO40 VIENNA AUSTRIJ TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM




#### **Monitor Current vs. Optical Output Power**

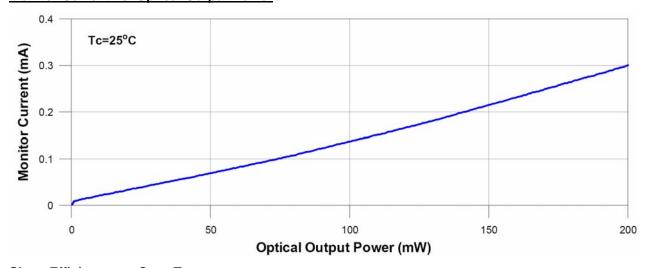

### Slope Efficiency vs. Case Temperature

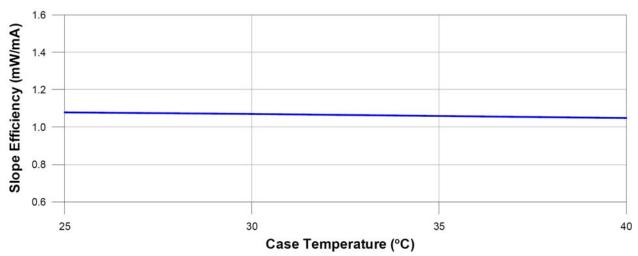

## Threshold Current vs. Case Temerature

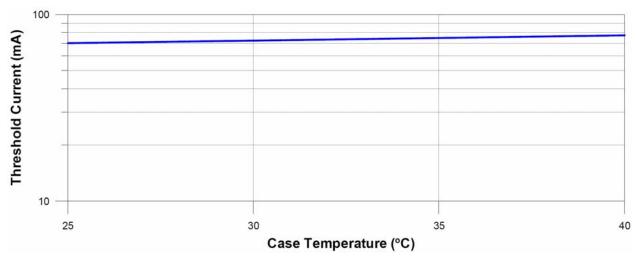



#### Safety of Laser light

Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.



• These LDs are emitting invisible light.

#### **Cautions**

#### 1. Operating methode

- This LD shall change its forward voltage requirement and optical ouput power according to temperature change. Also, the LD will require more operation current to maintain same ouput power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by swithing on and off does not exceed the
  maximum operating current level specified herein above as absolute maximum rating. Also,
  employ appropriat countermeasures to reduce chattering and/or overshooting in the circuit.

#### 2. Static Electricity

• Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handeling the product.

#### 3. Absolute Maximum Rating

Active layer of LDs shall have high current density and generate high electric field during its
operation. In order to prevent excessive damage, the LD must be operated strictly below
absolute maximum rating.

